


LGTA | HUMIDIFIER PRODUCT

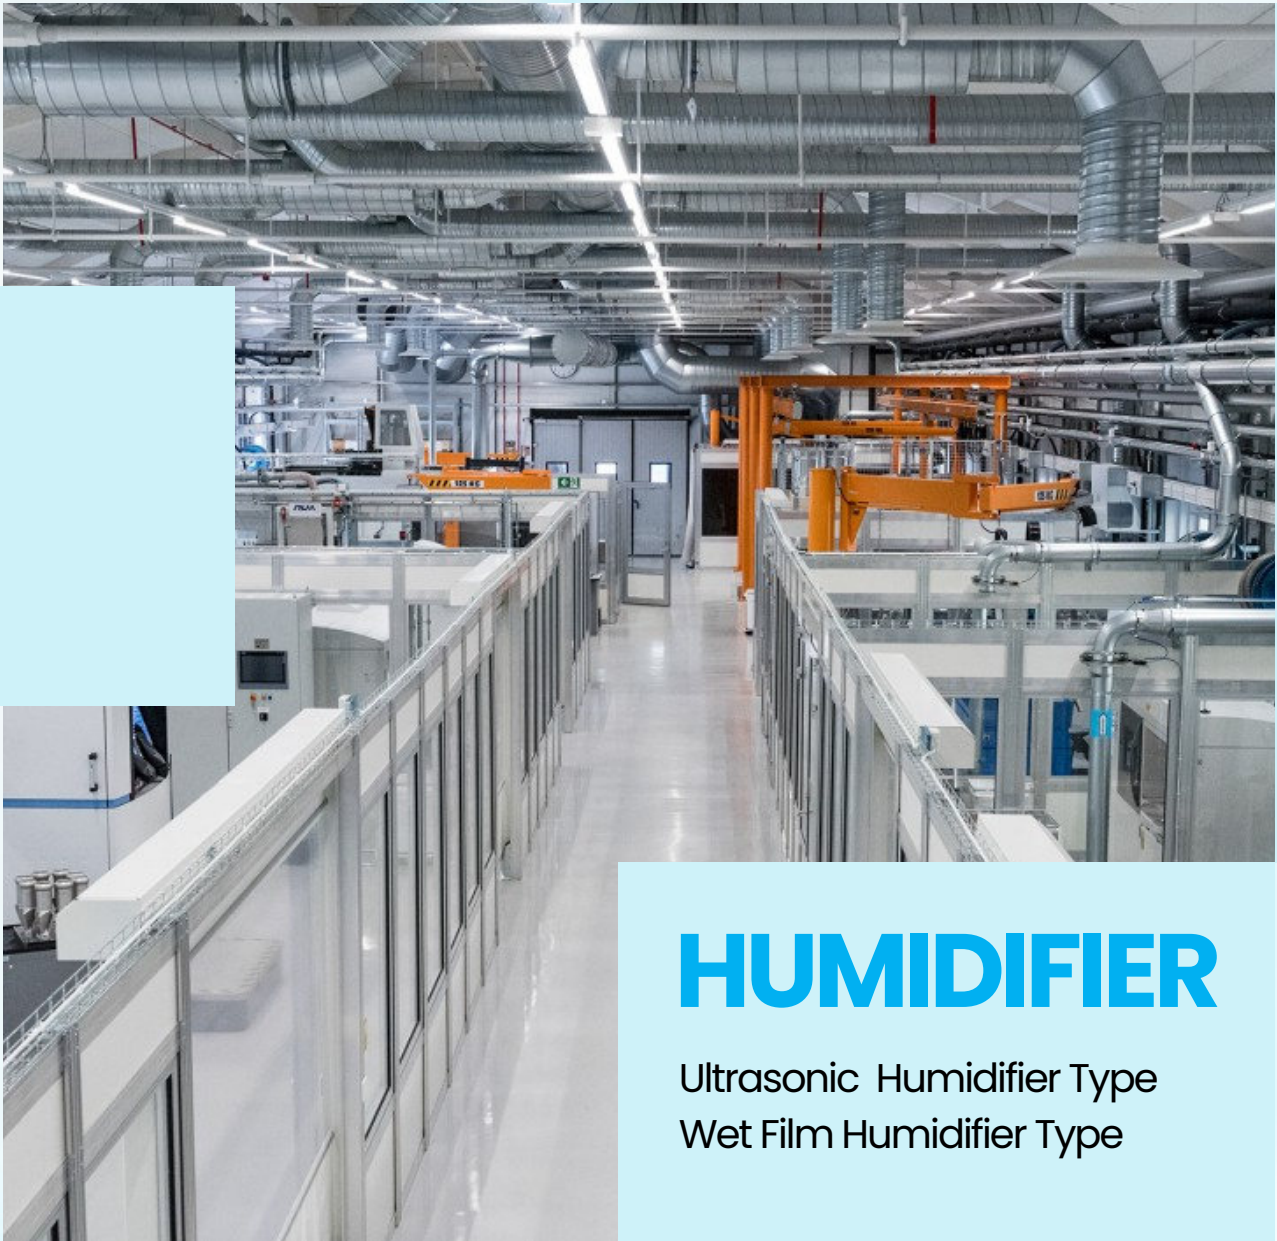

HUMIDIFIER

Ultrasonic Humidifier Type
Wet Film Humidifier Type

www.dwimirateknindo.com

Features



LED DISPLAY



ENERGY SAVING



AUTO WATER INLET



HIGH EFFICIENCY ATOMIZER



STAINLESS STEEL WATER TANK



LT UH3-UH6



LT UH9-UH18

Model No	LT-UH3	LT-UH6	LT-UH9	LT-UH12	LT-UH18
Mist Capacity (L/H) (30°C 80%RH)	3	6	9	12	18
Power Supply	AC 220-240V, 50/60Hz	AC 220-240V, 50/60Hz	AC 220-240V, 50/60Hz	AC 220-240V, 50/60Hz	AC 220-240V, 50Hz
Rated Input (W)	300	600	900	1050	1200
Rated Current (A)	1.36	2.73	4.1	4.77	5.45
Mist Hole (mm)	Ø110	Ø110	2xØ110	2xØ110	2xØ110
Air Circulation (m3/h)	145	145	350	350	450
Operation Temperature	1-40°C	1-40°C	1-40°C	1-40°C	1-40°C
Dimension	600x350x440	600x350x440	630x460x540	630x460x540	630x460x540
DxWxH (mm)					
Net Weight (kg)	25.5	28	38.5	41	43
Gross Weight (kg)	41	43.6	59.5	62	64

Spesification Data



LT UH21-UH24



LT UH30-UH60

Model No	LT-UH21	LT-UH24	LT-U30	LT-UH51	LT-UH60
Mist Capacity (L/H) (30°C 80%RH)	21	24	30	51	60
Power Supply	AC 220-240V, 50/60Hz	AC 220-240V, 50/60Hz	AC 220-240V, 50/60Hz	AC 220-240V, 50/60Hz	AC 220-240V, 50 Hz
Rated Input (W)	1200	1500	2100	3000	3600
Rated Current (A)	5.5	6.8	9.6	13.6	16.4
Mist Hole (mm)	3xØ110	3xØ110	3xØ110	3xØ110	3xØ110
Operation Temperature	1-40°C	1-40°C	1-40°C	1-40°C	1-40°C
Dimension	720x850x540	720x850x540	820x930x540	970x930x540	970x930x540
DxWxH (mm)					
Net Weight (kg)	75	80	100	125	135

Features

-  **LED DISPLAY**
-  **ENERGY SAVING**
-  **AUTO WATER INLET**
-  **STAINLESS STEEL WATER TANK**
-  **HUMIDITY SETTING RANGE 20% - 95%RH
+5% RH EACH TIME**



Model No	LT-WFH3B	LT-WFH6B	LT-WFH10B	LT-WFH12B	LT-WFH15B
Mist Capacity (L/H) (30°C 80%RH)	3	6	10	12	15
Power Supply	AC 220-240V, 50Hz	AC 220-240V, 50Hz	AC 220-240V, 50Hz	AC 220-240V, 50Hz	AC 220-240V, 50Hz
Rated Input (W)	16.5	185	340	420	500
Rated Current (A)	0.8	0.85	1.6	1.9	2.27
Water Pump	Yes	Yes	Yes	Yes	Yes
Water Tank (L)	45	60	70	70	70
Air Circulation (m3/h)	600	1200	2000	3000	3500
Operation Temperature	1-40°C	1-40°C	1-40°C	1-40°C	1-40°C
Dimension	500x400x1550	600x400x1650	700x400x1750	1189x530x1860	1189x530x1860
DxWxH (mm)					
Net Weight (kg)	63	72.5	85.5	105	115

Application



Greenhouse Industry



Textile Industry



Printing Industry



Workshop



Labolatory



Paper Making Industry

Project Refernces

PT. MAYORA INDAH TBK



INSTALATION HVAC SPLIT DUCT PT MAYORA INDAH TBK PLANT BISKYIT TANGEANG

PT. SANBE FARMA



CHAMBER FILLING ROOM HUMIDITY UNDER 25% TEMPERATURE 20°C +/- 2°C

PT. BERLINA TBK



AQUA BOTTLE CLOSED AC ROOM WITH SET POINT TEMPERATURE 23°C RH 55%

PT. SOUTH PASIFIC VISCOSE



MCCB ROOM & PANEL CONTROL ROOM TEMPERATURE 23°C +/-2°C RH 50% +/-5°C

HOKBEN



FILING ROOM, WEIGHING, AND PACKING SPICES TEMPERATURE 23°C +/-2°C RH MAX

PT. MINU GARMENT SUKSES



DRY ROOM GARMENT ROOM, FOR CONTROL OF WATER CONTENT BELOW 15 G/KG



PT. DWI MITRA TEKNINDO

Perumahan Bukit Asri Blok D1 Cibinong

Kab Bogor Jawa Barat - Indonesia



www.dwimirateknindo.com



[dwimirateknindo](https://www.instagram.com/dwimirateknindo)



PT DWI MITRA TEKNINDO
