



ShitShudo
· Dry ·



Industrial Dehumidifier Platinum Series

We Solving for Humidity Problem

Features




- LED display
- Front Wet Air Inlet and Top Front Dry Air Discharge.
- The body material is made of cold-rolled sheet metal with industrial grade powder coated.
- Evaporator and Condenser is Aluminum Fins with Hydrophilic coating.
- Low maintenance cost and Energy Efficient Design.
- Reliable and High-Performance Rotary Compressor. With 3-minutes delay start to protect compressor.
- Nylon Air filter is easy to remove, easy to clean
- The machine is built for 24/7 operation.
- Installation is very easy, just find a suitable place, connect the power supply, setting the humidity you want, then the machine will work automatically.
- Lower than 240L/DAY, default with Heavy Duty Wheel for easy mobility.
- Equipped with low pressure switch for protection on compressor
- Automatically defrost
- Customize service: RS485 optional.

Spesification Data

Model No	SSD168-D030B	SSD210-D030B	SSD240-D030B
Dehumidifying Capacity (30°C 80%RH)	168 L/D	210 L/D	240 L/D
Power Supply	AC 380V/50 Hz/3PH	AC 380V/50 Hz/3PH	AC 380V/50 Hz/3PH
Rated Input (W)	2700	3100	3300
Rated Current (A)	4.1	4.7	5
Refrigerant	R407C/R410A	R407C/R410A	R407C/R410A
Air Circulation (m3/h)	1520	2300	2600
Noise Level dB (A)	68	68	68
Operation Temperature	5-35°C	5-35°C	5-35°C
Dimension DxWxH (mm)	598x468x1618	767x526x1716	767x526x1716
Packing DxWxH (mm)	698x568x1768	876x626x1866	867x626x1866
Net Weight (kg)	94	115	120
Gross Weight (kg)	105	130	135

Spesification Data

Model No	SSD360-D030B	SSD480-D030B
Dehumidifying Capacity (30°C 80%RH)	360 L/D	480 L/D
Power Supply	AC 380V/50 Hz/3PH	AC 380V/50 Hz/3PH
Rated Input (W)	6200	8100
Rated Current (A)	9.4	12.3
Refrigerant	R407C/R410A	R407C/R410A
Air Circulation (m3/h)	4000	5000
Noise Level dB (A)	75	75
Operation Temperature	5-35°C	5-35°C
Dimension DxWxH (mm)	1187x508x1748	1187x508x1748
Packing DxWxH (mm)	1287x608x1898	1287x608x1898
Net Weight (kg)	204	210
Gross Weight (kg)	240	246

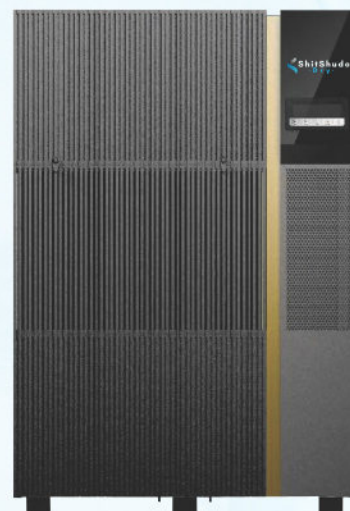

Model No	SSD720-D030B	SSD960-D030B
Dehumidifying Capacity (30°C 80%RH)	720 L/D	960 L/D
Power Supply	AC 380V/50 Hz/3PH	AC 380V/50 Hz/3PH
Rated Input (W)	15000	19000
Rated Current (A)	22.8	29
Refrigerant	R407C/R410A	R407C/R410A
Air Circulation (m3/h)	8000	10000
Noise Level dB (A)	75	75
Operation Temperature	5-35°C	5-35°C
Dimension DxWxH (mm)	1471x720x1943	1471x720x1943
Packing DxWxH (mm)	1517x820x2093	1517x820x2093
Net Weight (kg)	300	330
Gross Weight (kg)	330	370



Display Board Optional 1



Display Board Optional 2

Application



· Liblary ·



· Warehouse ·



· Hospital ·



· Labolatory ·



· Garment Industry ·



· Food & Beverage Industry ·

Application



· Pharmacy ·




· Office ·



· Museum ·



· Restaurant ·

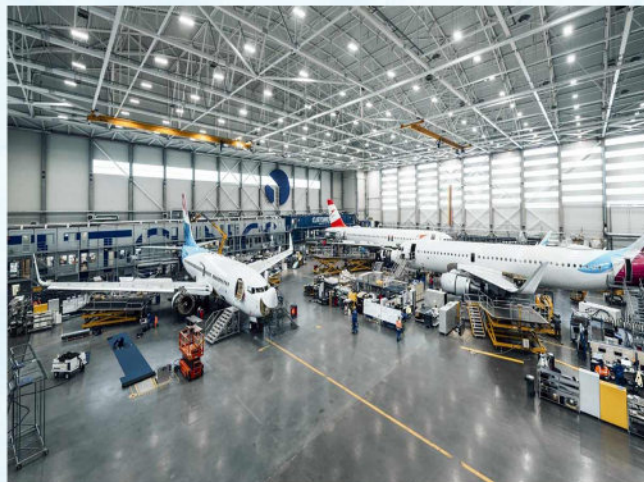

· Aircraft Hangar ·



· Data Center Room ·

Reference Project

· PT. MAYORA INDAH TBK ·



INSTALATION HVAC SPLIT DUCT PT MAYORA INDAH TBK PLANT BISKYIT TANGEANG

· PT. SANBE FARMA ·



CHAMBER FILLING ROOM HUMIDITY UNDER 25% TEMPERATURE $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$

· PT. BERLINA TBK ·



AQUA BOTTLE CLOSED AC ROOM WITH SET POINT TEMPERATURE 23°C RH 55%

· PT. SOUTH PASIFIC VISCOSE ·



MCCB ROOM & PANEL CONTROL ROOM TEMPERATURE $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ RH 50% $\pm 5^{\circ}\text{C}$

· HOKBEN ·



FILING ROOM, WEIGHING, AND PACKING SPICES TEMPERATURE $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ RH MAX 60%

· PT. MINU GARMENT SUKSES ·



DRY ROOM GARMENT ROOM, FOR CONTROL OF WATER CONTENT BELOW 15 G/KG

Reference Project

· BIOFARMA ·



**RUANG LAF TEMPERATURE 23°C +/- 2°C
MAXIMAL HUMIDITY 35%**

· SANTOSA HOSPITAL ·




**CLEAN ROOM CT SCAN SUHU 23°C RH UNDER
50%**

· FAST LAB JAKARTA ·



**CLEAN ROOM FAST LAB JAKARTA CLASS B,C
& CLASS D STEAM SELL APPLICATION**

· RSGM UNJANI ·

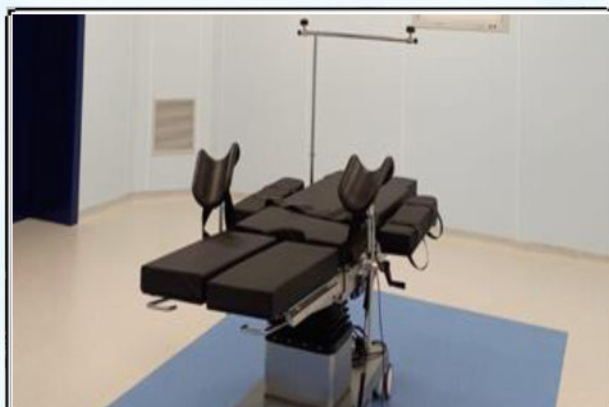

**CLEAN ROOM RSGM UNJANI, CLEAN ROOM
RUANG OPERASI MOT ROOM CLASS 1000**

· SANTOSA JAYA ABADI ·



**COOLING DEHUMIDIFIKASI 23°C +/- 2°C RH
45% +/- 5%**

· GENBODY INDONESIA ·



**RUANG PRODUKSI ALAT RAPID TEST RH UNDER
20% TEMPERATURE 20°C +/- 2°C**

Reference Project

· PT. MARIN LIZA ·



SUPPLY & DESIGN HVAC SYSTEM UNTUK EFFERVICENT RH 20%

· PT. NOVA CHEMIE UTAMA ·



PROJECT RUANG CLEAN ROOM ISO 8 UNTUK SOFT CAPSULE DRYING RH UNDER 25%

· PT. LAPI LABOLATORIES CIKANDE ·



SUPPLY DAN INSTALL SYSTEM AHU DEHUMIDIFIER

· PT. SARI KALDU NABATI ·



SUPPLY DAN DESIGN SYSTEM TATA UDARA RUANG FILLING DAN FORMULASI GEDUNG A

· SOHO FARMA ·



EFFERVICENT ROOM, CHILLER AND COLD SYSTEM, CELING HEPA + INTEGRITY, SCALING PIPA CHILLER

· NABATI MAJALENGKA ·



SUPPLY DEHUMIDIFIER DAN AHU



PT. Dwi Mitra Teknindo

Perumahan Bukit Asri Blok D1 Cibinong

Kab Bogor Jawa Barat - Indonesia

